



JHPV TECH


WWW.JHPVTECH.COM

JH-G12DS132C 700~760W

24.46% Efficiency

700~760W (210x210 mm Half-Cut Cell) 132 pcs

N-TYPE Bifacial Silver Frame

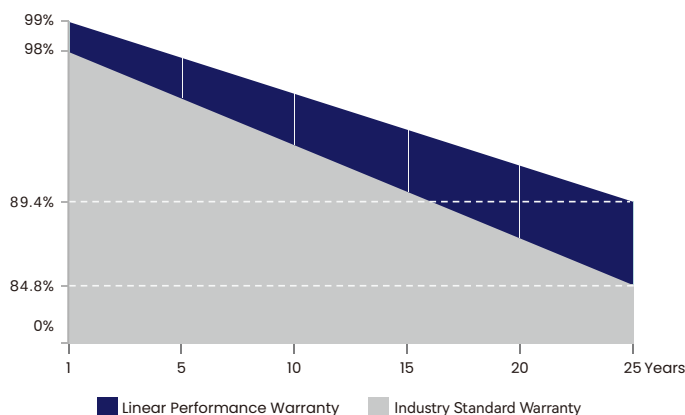

15 Years
Material & Craft
Quality
Assurance

30 Years
84.8% Output
Power
Guarantee


KEY FEATURES HIGHLIGHTS



Mono MBB half cut
Original European Parts



EU Standard
European Quality
Control



PID Resistance
High stability and torsion
free with Wave Shape

PRODUCT CERTIFICATIONS



Production process
reliability test
electro-luminance
inspection



AR coating
tolerance and lower
resistive loss



Excellent Durability
resistant to salt mist, ammonia,
dust and sand, snail trail.



Reduce BOS cost
increase ROI
Low temp coefficient
(PM_{ax}) for higher output



Wide Applications
Durability against Extreme
Environmental Conditions



Lower Losses
Multi Busbar Technology for
better Light trapping

JH-G12DS132C 700~760W



Electrical parameters at Standard Test Conditions (STC*) & Nominal Operating Cell Temperature (NOCT*)

Module Type	700W / 534W	705W / 540W	710W / 543W	715W / 547W	720W / 551W	725W / 555W	730W / 559W	735W / 563W	740W / 567W	745W / 574W	750W / 578W	755W / 582W	760W / 586W
Test Environment	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT
Power output tolerances P _{max} (W)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)
Module efficiency(%)	22.53	22.70	22.86	23.02	23.18	23.34	23.50	23.66	23.82	23.98	24.14	24.30	24.46
Voltage at P _{max} V _{mp} (V)	40.50 / 38.00	40.70 / 38.30	40.90 / 38.50	41.10 / 38.70	41.30 / 38.80	41.50 / 38.90	41.70 / 39.10	41.90 / 39.30	42.10 / 39.50	42.30 / 39.70	42.50 / 39.90	42.70 / 40.10	42.90 / 40.30
Current at P _{max} I _{mp} (A)	17.29 / 14.05	17.33 / 14.08	17.36 / 14.12	17.40 / 14.14	17.44 / 14.19	17.48 / 14.23	17.52 / 14.27	17.56 / 14.31	17.60 / 14.35	17.64 / 14.39	17.68 / 14.43	17.72 / 14.47	17.76 / 14.51
Open-circuit voltage V _{oc} (V)	48.60 / 46.00	48.80 / 46.30	49.00 / 46.50	49.20 / 46.70	49.40 / 46.90	49.60 / 47.10	49.80 / 47.30	50.00 / 47.50	50.20 / 47.70	50.40 / 47.90	50.60 / 48.10	50.80 / 48.30	60.00 / 48.50
Short-circuit current I _{sc} (A)	18.32 / 14.76	18.36 / 14.80	18.40 / 14.83	18.44 / 14.86	18.49 / 14.90	18.53 / 14.94	18.57 / 14.98	18.61 / 15.02	18.65 / 15.06	18.69 / 15.10	18.73 / 15.14	18.77 / 15.18	18.81 / 15.22

*STC: 1000 W·m⁻² irradiance, 25°C cell temperature, AM 1.5 spectrum according to EN 60904-

*NOCT: open-circuit module operation temperature at 800 W·m⁻² irradiance, 20°C ambient temperature, 1 m·s⁻¹ wind speed.

GENERAL CHARACTERISTICS

Dimensions (L / W / H) 2384 mm / 1303mm / 33 mm

Weight 38.7 kg

PACKAGING SPECIFICATIONS

Number of modules per pallet 33

Number of pallets per 40' container 18

THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	45 ± 2
Temperature coefficient of P _{max}	γ	% / °C	-0.30
Temperature coefficient of V _{oc}	β	% / °C	-0.24
Temperature coefficient of I _{sc}	α	% / °C	0.045


*NOCT: open-circuit module operation temperature at 800 W·m⁻² irradiance, 20°C ambient temperature, 1 m·s⁻¹ wind speed.

OPERATING CONDITIONS

Max. system voltage	1500 Vdc
Max. series fuse rating*	35 A
Operating temperature range	- 40°C to 85°C
Max. static load, front (e.g., snow)	5400 Pa
Max. static load, back (e.g., wind)	2400 Pa
Max. hailstone impact (diameter/velocity)	25 mm / 23 m·s ⁻¹

*DO NOT CONNECT FUSE IN COMBINER BOX WITH TWO OR MORE STRINGS IN PARALLEL CONNECTION.

BACK VIEW (Units: mm)

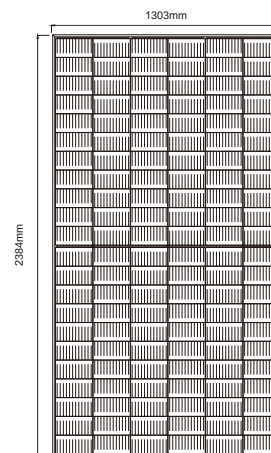

SECTION A-A



Warning: Read the Installation and User Manual in it's entirety before handling, installing and operating Solar modules.



CONSTRUCTION MATERIALS

Cell (material / quantity)	monocrystalline silicon / 6 x 22
Glass (material / thickness)	low-iron tempered glass / 2 mm + 2 mm
Frame (material)	anodized aluminum alloy
Junction box (type / protection degree)	3 bypass diodes / ≥ IP68
Cable (length / cross-sectional area)	± 300 mm or customized length / 4 mm ²

NINGBO JING HONG ENERGY
TECHNOLOGY CO., LTD.

Email: Sales@jhpvtech.com

Web: <http://jhpvtech.com>

Address: No. 1 Xinsi Road, Xinbei
District, Changzhou City, Jiangsu
Province, P.R. China

▲ Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.