



# JHPV TECH


WWW.JHPVTECH.COM

## JH-BM10DS144C4 620~640W

**24.4% Efficiency**

620~640W (182x192 mm Half-Cut Cell )144 pcs

N-BC Bifacial Silver Frame

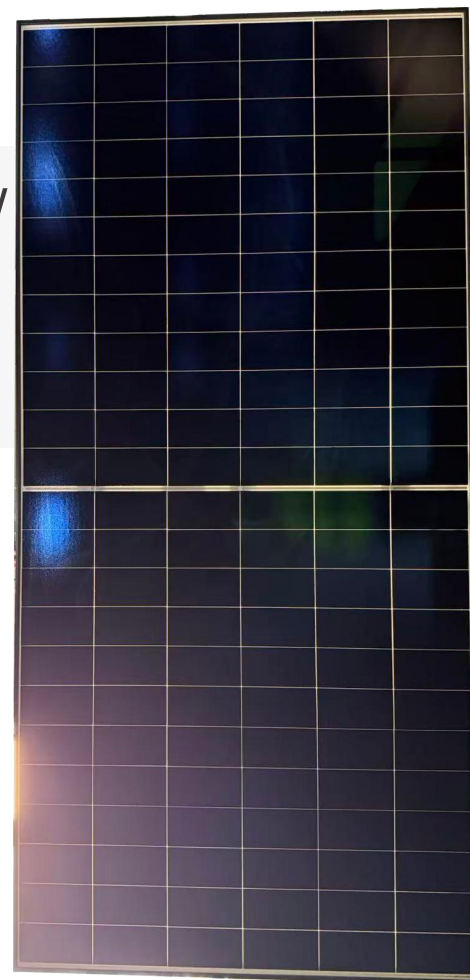

**15 Years**  
Material & Craft  
Quality  
Assurance

**30 Years**  
84.8% Output  
Power  
Guarantee

### KEY FEATURES HIGHLIGHTS



Mono MBB half cut  
Original European Parts



EU Standard  
European Quality  
Control



PID Resistance  
High stability and torsion  
free with Wave Shape

### PRODUCT CERTIFICATIONS



Production process  
reliability test  
electro-luminance  
inspection



AR coating  
tolerance and lower  
resistive loss



Excellent Durability  
resistant to salt mist, ammonia,  
dust and sand, snail trail.



Reduce BOS cost  
increase ROI  
Low temp coefficient  
(PMAX) for higher output



Wide Applications  
Durability against Extreme  
Environmental Conditions



Lower Losses  
Multi Busbar Technology for  
better Light trapping

# JH-BM10DS144C4 620~640W



**JHPV TECH**

## Electrical parameters at Standard Test Conditions (STC\*) & Nominal Operating Cell Temperature (NOCT\*)

Module Type	620W / 472W	625W / 476W	630W / 480W	635W / 483W	640W / 487W
Test Environment	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT	STC / NOCT
Power output tolerances P <sub>max</sub> (W)	(0,+5)	(0,+5)	(0,+5)	(0,+5)	(0,+5)
Module efficiency(%)	23.0	23.1	23.3	23.5	23.7
Voltage at P <sub>max</sub> V <sub>mpp</sub> (V)	44.27 / 42.05	44.37 / 42.15	44.47 / 42.25	44.57 / 42.35	44.67 / 42.45
Current at P <sub>max</sub> I <sub>mp</sub> (A)	14.01 / 11.23	14.09 / 11.29	14.17 / 11.35	14.25 / 11.41	14.33 / 11.49
Open-circuit voltage V <sub>oc</sub> (V)	53.62 / 50.96	53.72 / 51.05	53.82 / 51.15	53.92 / 51.25	54.02 / 51.34
Short-circuit current I <sub>sc</sub> (A)	14.66 / 11.77	14.74 / 11.83	14.82 / 11.89	14.90 / 11.96	14.98 / 12.03

\*STC: 1000 W·m<sup>-2</sup> irradiance, 25°C cell temperature, AM 1.5 spectrum according to EN 60904-

\*NOCT: open-circuit module operation temperature at 800 W·m<sup>-2</sup> irradiance, 20°C ambient temperature, 1 m·s<sup>-1</sup> wind speed.

3.

## GENERAL CHARACTERISTICS

Dimensions (L / W / H)	2382 mm / 1134mm / 30 mm
Weight	33.8 kg

## PACKAGING SPECIFICATIONS

Number of modules per pallet	37
Number of pallets per 40' container	20

## THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	45 ± 2
Temperature coefficient of P <sub>max</sub>	γ	% / °C	-0.26
Temperature coefficient of V <sub>oc</sub>	β	% / °C	-0.20
Temperature coefficient of I <sub>sc</sub>	α	% / °C	0.050

\*NOCT: open-circuit module operation temperature at 800 W·m<sup>-2</sup> irradiance, 20°C ambient temperature, 1 m·s<sup>-1</sup> wind speed.

## OPERATING CONDITIONS


Max. system voltage	1500 V <sub>dc</sub>
Max. series fuse rating*	25 A
Operating temperature range	- 40°C to 85°C
Max. static load, front (e.g., snow)	5400 Pa
Max. static load, back (e.g., wind)	2400 Pa
Max. hailstone impact (diameter/velocity)	25 mm / 23 m·s <sup>-1</sup>

\*DO NOT CONNECT FUSE IN COMBINER BOX WITH TWO OR MORE STRINGS IN PARALLEL CONNECTION.

## CONSTRUCTION MATERIALS

Cell ( material / quantity )	monocrystalline silicon / 6 x 24
Glass (material / thickness)	low-iron tempered glass / 2 mm + 2 mm
Frame (material)	anodized aluminum alloy
Junction box (type / protection degree)	3 bypass diodes / ≥ IP68
Cable (length / cross-sectional area)	± 1200 mm or customized length / 4 mm <sup>2</sup>

## BACK VIEW (Units: mm)

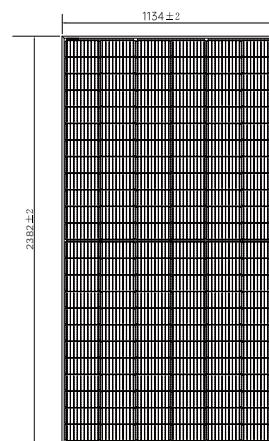

SECTION A-A



Warning: Read the Installation and User Manual in its entirety before handling, installing and operating Solar modules.



**NINGBO JING HONG ENERGY TECHNOLOGY CO., LTD.**

Email: Sales@jhpvtech.com

Web: <http://jhpvtech.com>

Address: No. 1 Xinsi Road, Xinbei District, Changzhou City, Jiangsu Province, P.R. China



▲ Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.